Technical Data Sheet

Skirting Rubber

Skirting Rubber is manufactured from a general purpose rubber and used mainly in the Mining & Quarry industry, as a side skirt on conveyor belt systems. Agile Screening stocks an extensive range of skirting rubber profiles in a variety of thicknesses.

Benefits:

- Long wearing
- Good abrasion & tear resistance
- Prevents materials falling off conveyors

Applications:

- Conveyor belt skirt
- General use

Types:

Agile Screening offers 3 types of skirting rubber in variety of thicknesses. Most commonly available in 30m rolls.

1. Premium soft (longer life, 40 Duro rubber)
2. Natural (60 Duro rubber)
3. FRAS (Fire Resistant Anti-Static) (60 Duro rubber)

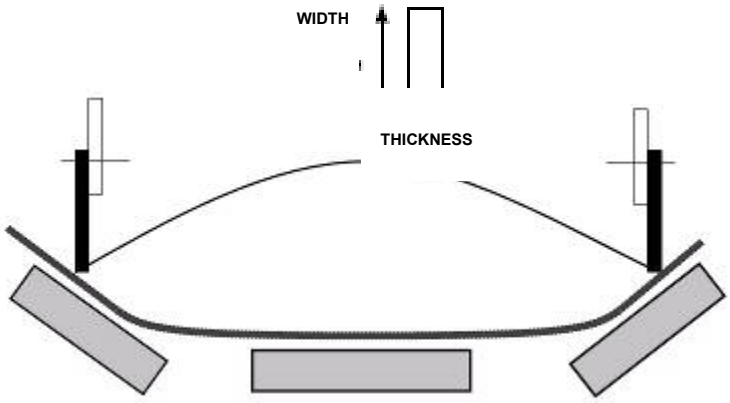

Thick (mm)	Width (mm)
6	75
6	125
6	200
6	250
6	300
9	100
9	150
9	200
9	250
9	300
12	75
12	125
12	200
12	250
12	300
16	75
16	125
16	200
16	250
16	300
19	75
19	150
19	200
19	250
19	300